



**Europäisches
Patentamt**

**European
Patent Office**

**Office européen
des brevets**

#5
JC571 U.S. PTO
09/713179



Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

99309297.2

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

I.L.C. HATTEN-HECKMAN

DEN HAAG, DEN
THE HAGUE,
LA HAYE, LE

18/07/00

THIS PAGE BLANK (USPTO)



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

Blatt 2 der Bescheinigung
Sheet 2 of the certificate
Page 2 de l'attestation

Anmeldung Nr.:
Application no.:
Demande n°: **99309297.2**

Anmeldetag:
Date of filing:
Date de dépôt: **23/11/99**

Anmelder:
Applicant(s):
Demandeur(s):
LUCENT TECHNOLOGIES INC.
Murray Hill, New Jersey 07974-0636
UNITED STATES OF AMERICA

Bezeichnung der Erfindung:
Title of the invention:
Titre de l'invention:
Mobile telecommunications systems

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:
State:
Pays:

Tag:
Date:
Date:

Aktenzeichen:
File no.
Numéro de dépôt:

Internationale Patentklassifikation:
International Patent classification:
Classification internationale des brevets:
H04Q7/38

Am Anmeldetag benannte Vertragstaaten:
Contracting states designated at date of filing: **AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE**
Etats contractants désignés lors du dépôt:

Bemerkungen:
Remarks:
Remarques:

THIS PAGE BLANK (USPTO)

Mobile Telecommunications Systems

This invention relates to mobile telecommunications systems, particularly though not exclusively the Universal Mobile Telecommunications System (UMTS).

5

UMTS is defined in various protocols devised by the ETSI project 3GPPTM. Generally UMTS consists of four layers, a physical layer, a Medium Access Control Layer (MAC), a Radio Link Control layer (RLC), and a Radio Resource Control layer (RRC). In particular document TS25.321 V.3.0.0 (1999-06) sets out the MAC protocol specification. A particular
10 issue addressed by MAC is the mapping of information channels from the RLC layer to information channels leading to the physical layer. These latter channels are known as Transport Channels. The MAC protocol describes these, as follows:

Common transport channel types are:

- Random Access Channel(s) (RACH)
- 15 • Forward Access Channel(s) (FACH)
- Downlink Shared Channel(s) (DSCH)
- DSCH Control Channel
- Common Packet Channel(s) (CPCH) for UL FDD operation only
- Uplink Shared Channel(s) (USCH), for TDD operation only
- 20 • ODMA Random Access Channel(s) (ORACH)
- Broadcast Channel (BCH)
- Synchronisation Channel (SCH), for TDD operation only

Paging Channel (PCH)

Dedicated transport channel types are:

- 25 • Dedicated Channel (DCH)
- Fast Uplink Signalling Channel (FAUSCH)
- ODMA Dedicated Channel (ODCH)

Information channels leading from RLC to MAC are known as logical channels. Their
30 Structure is shown in Figure 1 of the accompanying drawings. The mappings of the information channels to their transport channels are predefined by the RRC. At any one moment, a combination of logical channels can be mapped to a combination of transport channels. Each transport channel is defined by a Transport Format (for Constant Bit Rate

services) or a Transport Format Set (for Variable Bit Rate services) which contains essentially the following information:

1. Transport Block (TB) size(s)

Transport Block Set (TBS) size(s)

5 Transmission Time Interval (TTI)

The transport block sizes define all the possible the basic information block size of a transport channel and the transport block set sizes defines all the possible number of such basic information blocks that the transport channel can carry in one Transmission Time Interval. The Transmission Time Interval is the interval over which all the above variables
10 are set, the variables being reset in the next TTI. The characteristics of a combination of transport channels are defined by the Transport Format Combination Set (TFCS). The TFCS contains set of all possible transport format combinations; each transport format combination contains the transport formats of all transport channels that come under one TFCS.

15 Whilst the MAC protocol specification makes clear that the MAC layer is responsible for the Transport Format Combination Selection, the specification is silent as to the manner in which the MAC layer should do this.

Accordingly, it is an object of the present invention to provide a method and means
20 for implementing Transport Format Combination Selection in the MAC layer of UMTS, being relatively simple, readily implemented, and reliable.

The present invention provides in a first aspect, in a mobile telecommunications system, a method of directing data units from buffer means to channels for transmission of the
25 data units, the method comprising:

a. providing a set of information channels for connection to the buffer means, and providing a set of transport channels for transmission of the data units,

b. selecting a subset of said set of information channels and a subset of said set of transport channels for interconnection, characterised by:

30 c. selecting for each transport channel one or a plurality of information channels to be multiplexed on the transport channel,

d. prioritising the selected information and/ or transport channels according to a predetermined scheme, in dependence on the characteristics of the information channels and/or the data to be transmitted therethrough; and

e. determining how many data units may be transmitted from the respective buffer means to the transport channels in a timing interval.

The present invention provides in a second aspect, apparatus for directing data units from
5 buffer means to channels for transmission of the data units in a mobile telecommunications system, comprising:

a set of information channels for connection to the buffer means, and a set of transport channels for transmission of the data units,

means for selecting a subset of said set of information channels and a subset of said set of
10 transport channels for interconnection, characterised by:

means for selecting for each transport channel one or a plurality of information channels to be multiplexed on the transport channel,

means for prioritising the selected information and/or transport channels according to a predetermined scheme; in dependence on their characteristics and/or the data to be transmitted
15 therethrough; and

means for determining for such logical channels how many data units may be transmitted from the respective buffer means.

Thus in accordance with the invention, a particularly simple yet reliable method and
20 means is provided for connection of data in buffers in the RLC layer of UMTS to transport channels in the MAC layer for transmission, such that the most important data is transmitted first, and a multiple priority scheme is implemented to ensure that the data is appropriately routed into the channels, taking into account the needs of the system equipment.

As preferred, a reference mapping table is formed to relate the transport channels to
25 the information channels and containing the respective buffer status, the number of data units for transmission being determined from the mapping table.

As preferred the method of the invention is carried out for each Transmission Time Interval (TTI), in multiples of 10msec. For those buffers and information (logical) channels tied to a longer TTI, these will be deselected from the next TTI. Thus, the Transport Format
30 Combination Selection (TFC Selection) selects the appropriate transport format for each transport channel depending on the instantaneous rate. This algorithm resides on the MAC layer.

Brief Description of the Drawings

A preferred embodiment of the invention will now be described with reference to the accompanying drawings, wherein:

Figure 1 is a schematic diagram of logical channels for the RLC layer of UMTS;

5 Figure 2 is a schematic diagram showing flow of control signal and data during the method of the invention;

Figure 3 is a schematic flow diagram of the selection of TFC in accordance with the invention;

Figure 4 is a schematic block diagram of the MAC and RLC layers in accordance with the
10 invention; and

Figure 5 is a modified view of Figure 4, conforming to an example given in the text below.

Description of the Preferred Embodiment

Referring now to the Drawings, Figure 4 shows the apparatus according to the invention
15 embodied in a UMTS system comprising a physical layer PHY, a MAC layer, and an RLC layer. A MAC control unit 2, responsible for controlling dedicated transport channels DCH#1, #2, etc in the physical layer comprises a TTI Timer controller unit 10. A timer (not shown) is located in the PHY layer (layer 1), and unit 10 derives the timing intervals for the transport channels. A controller unit 12, and a TFC selection unit 14 are provided. Controller
20 unit 12 transmits and receives control signals of RLC entities #1, #2, #3 etc. in the RLC layer. Each entity has a respective buffer 161, 162, 163 for holding data units (PDU) to be transmitted on the dedicated channels. In the configuration shown in Figure 4, buffer 161 is coupled to a logical channel DCCH. Buffer 162 is coupled to a logical channel DTCH#1, and the channels are multiplexed together in multiplexer unit 20 onto a single transport channel
25 DCH#1. Two PDUs 22 from channel DCCH are multiplexed onto the channel for a single PDU 24 from channel DTCH#1. Data from buffer 163 is passed directly onto transport channel DCH#2 without multiplexing.

Referring now to Figure 2, this shows the flow of control signals and data during the performance of the method of the invention, between physical layer PHY, and MAC and RLC
30 layers. Referring to the numerals at the left hand side of the Figure:

1. The L1 Timer is a Layer 1 timer which is triggered at every 10ms.
2. In this example, the L1 Timer triggers the respective TTI Timer 10 for DCH #1 and #2.

The TTIs for DCH #1 and DCH #2 are 10ms and 20ms respectively.

3. This in turn triggers the RLCBUFFERSTATUS_ind to each RLC entity to request the RLC Buffer Status.
4. Each RLC entity responds with its RLC Buffer Status using the RLCBUFFERSTATUS_resp.
5. TFC selection is then performed to produce the closest TFC that fits the RLC Buffer Status for each RLC entity. (See Figure 3 for the TFC selection algorithm)
6. This TFC result is conveyed to each RLC entity via MAC_STATUS_ind.
7. This triggers each RLC entity to send the amount of RLC-PDUs which is dictated by the TFC result via MAC-d_UNIT_DATA_req.
8. The whole procedure continues in a similar fashion as step 1 to 7. The specific example given below corresponds to steps 8 to 12.

N.B.:

- The TFC selection is performed at the minimum TTI (in this case, the TTI Timer for DCH#1, 10 msec).
- In the first TFC selection, the TFI (Transport Format Indicator) allowable by the subset TFCS for DCH#1 and DCH#2 needs to be determined.
- In the second TFC selection, only the TFI of DCH#1 needs to be determined since the TTI Timer for DCH#2 is not triggered in the current frame. This means that the TFI for DCH#1 is restricted to certain TFCs.

Explanation of Figure 3 (Algorithm)

Referring to the block 30, the inputs to the algorithm include:

- TFCS Subset
- TFSs (Transport Format Sets) of all DCHs
- Logical Channel Multiplexing Info.
- Logical Channel Priority Info.
- RLC Buffer Status for all Logical Channels
- TTI Timers triggered in Current Radio Frame
- TTI Timers triggered in Previous Radio Frames that is still Running

Output is the Transport Format Combination (TFC).

The algorithm is shown in the flow diagram comprising steps A, B, and C, as follows.

- A. Determine all the possible transport block combinations from information in TFCS and the dynamic part of TFS of the DCHs which have their TTI Timers triggered. The DCHs with their TTI Timers still running will not have to select their TFI again (since it has actually been sent to Layer 1 already). However, the TFIs of these DCHs will constrain the possible transport block combinations.

For example, if the subset TFCS is

	DCH#1(TTI=10ms)	DCH#2(TTI=20ms)
TFC#1	0 TB	0 TB
TFC#2	1 TB	1 TB
TFC#3	2 TBs	1 TB

TFC selection is performed at the lowest TTI. In this case, it is 10ms.

In the first TFC selection, TFC#2 (say) has been selected in which DCH#1 can send 1 TB and DCH#2 can send 1TB. Note that the TTI for DCH#2 is 20ms. In the second TFC selection, only the TFI of DCH#1 has to be determined. However due to the constraint given by DCH#2 (=1TB), only TFC#2 and TFC#3 can be selected. Hence the possible Transport Block Combinations are TFC#2 and TFC#3., i.e.

	DCH#1(TTI=10ms)
TFC#2	1 TB
TFC#3	2 TBs

- B. As a result of the information channel multiplexing and priority, a mapping table 32 to relate the DCHs to the DTCHs/DCCH with their RLC buffer status is needed. The mapping table is arranged with each row representing the configuration of a transport channel, the top row being the highest priority transport channel, with lower rows being arranged in order of descending priority. Each row gives the logical or information channels multiplexed onto a transport channel, with the logical channels being arranged in order of descending priority to the right. Assuming that there are two priority status (high or low), the following rules can be applied to create the mapping table:

1. Find the DCH with the most high priority status information channels (DTCHs/DCCH).

Arrange the information channel DTCHs/DCCH according to their priority. The order in which the information channel with the same priority is not important.

- 5 Place the DCH mapping information into the Mapping Table.

4. Place the RLC buffer status as elements of the Mapping Table.

5. Place the next DCH with the next highest high priority status DTCHs/DCCH and go to step 2 until all DCHs that need to select a TFI is completed.

- 10 For example, taking the example in A at the second TFC selection and assuming that the DCH#1 contains multiplexing of DTCH#1(priority:low) and DCCH (priority:high) and the DCH#2 contains only DTCH#2 (priority:low). The RLC buffer status for DTCH#1, #2 and DCCH is 1, 4, 3 RLC-PDU(s) respectively. DCH#1 can send 2 TBs, DCH#2 can send 3 TBs .The Mapping Table is:

DCH#1	DCCH(3 RLC-PDU)	DTCH#1(1 RLC-PDU)
-------	-----------------	-------------------

At the same time as the mapping table is created, a Transport Block Combination table 34 is created, which gives the number of allowable transport blocks that may be transmitted on each transport channel in each TTI. Although shown in Figure 3 as a single column, in general the table 34 will be a matrix of row and columns, each column being designated for a different transport channel, and each row corresponding to a TTI.

- C. Starting from the DCH with the highest priority, start determining the allowable RLC-PDU which may be transmitted to the transport channel from the highest priority information channel DTCH/DCCH, using the mapping table 32 and Transport Block Combination table 34.

Taking the previous example, TFC#3 is chosen so that DCH#1 can send at least the 2 RLC-PDU for DCCH . This arrangement is shown in Figure 5.

THIS PAGE BLANK (USPTO)

CLAIMS

1. In a mobile telecommunications system, a method of directing data units from buffer
5 means to channels for transmission of the data units, the method comprising:
- a. providing a set of information channels for connection to the buffer means, and providing a set of transport channels for transmission of the data units,
 - b. selecting a subset of said set of information channels and a subset of said set of transport channels for interconnection, characterised by:
 - 10 c. selecting for each transport channel one or a plurality of information channels to be multiplexed on the transport channel,
 - d. prioritising the selected information and/ or transport channels according to a predetermined scheme, in dependence on the characteristics of the information channels and/or the data to be transmitted therethrough; and
 - 15 e. determining how many data units may be transmitted from the respective buffer means to the transport channels in a timing interval.
2. In the Universal Mobile Telecommunications System, a method of directing data units from buffer means in the Radio Link Control Layer (RLC) to transport channels in the
20 Medium Access Control (MAC) layer for transmission of the data units as claimed in claim 1, the method including providing a set of information channels in the RLC layer for connection to the buffer means, and providing a set of transport channels in the MAC layer for transmission of the data units,
- 25 3. A method according to claim 1 or 2, wherein, in step d, the transport channels are prioritised according to the characteristics of the information channels and/or the data to be transmitted therethrough.
4. A method according to claim 3, wherein, in step d, the transport channels are prioritised
30 according to the characteristics of the information channels.

5. A method according to any preceding claim, wherein for steps d and e, a reference mapping table is formed to relate the transport channels to the information channels with the elements of the table comprising the respective buffer status.

6. A method according to claim 5, wherein the first row or column of the table contains the highest priority transport channel, and the second row or column the next highest priority channel.

7. A method according to claim 6, wherein for each row or column, the multiplexed information channels are arranged in sequence in order of descending priority.

8. A method according to any of claims 5 to 7, wherein a transport block combination table is formed to relate the number of data units which may be transmitted at each timing interval on each transport channel.

9. A method according to any preceding claim, wherein the method is carried out for each consecutive transmission timing interval (TTI).

10. A method according to claim 9, wherein the TTI is the minimum TTI assigned for a transport channel, and those transport channels having assigned a longer TTI are not selected in the next TTI.

11. Apparatus in a mobile telecommunications system for directing data units from buffer means (161-163) to channels (DCH) for transmission of the data units, comprising:

a set of information channels (DTCH, DCCH) for connection to the buffer means, and a set of transport channels (DCH) for transmission of the data units,

means for selecting a subset of said set of information channels and a subset of said set of transport channels for interconnection, characterised by:

means (14) for selecting for each transport channel one or a plurality of information channels to be multiplexed on the transport channel,

means for prioritising the selected information and/or transport channels according to a predetermined scheme; in dependence on their characteristics and/or the data to be transmitted therethrough; and

means for determining for such information channels how many data units may be transmitted from the respective buffer means.

12. Apparatus according to claim 11, wherein the prioritising means is arranged to
5 prioritise the transport channels.

13. Apparatus according to claim 12, wherein the prioritising means is arranged to
prioritise the transport channels in dependence on the characteristics of the information
channels.

10

14. Apparatus according to any of claims 11 to 13, wherein the prioritising means is
arranged to construct a mapping table (32) to relate the transport channels to the information
channels with elements of the table being formed by respective buffer status.

15. Apparatus according to claim 14, wherein the prioritising means is arranged to
15 construct a transport block combination table (34) to relate the number of data units which
may be transmitted at each timing interval on each transport channel.

16. Apparatus according to any of claims 11 to 15, wherein the prioritising means is
20 operative to determine priorities for each consecutive transmission timing interval.

17. Apparatus according to claim 16, wherein the prioritising means is operative to
determine priorities for each minimum transmission timing interval, but excluding those
channels which are continuing with a longer transmission interval.

25

THIS PAGE BLANK (USPTO)

ABSTRACT

Mobile Telecommunications Systems

- 5 In the Universal Mobile Telecommunications System, a simple, reliable and easily implemented method of providing Transport Format Combination Selection for directing data units from buffer means in the Radio Link Control Layer (RLC) to transport channels in the Medium Access Control (MAC) layer for transmission of the data units, the method comprising:
- 10 providing a set of information channels in the RLC layer for connection to the buffer means, and providing a set of transport channels in the MAC layer for transmission of the data units,
- selecting a subset of said set of information channels and a subset of said set of transport channels for interconnection,
- 15 selecting for each transport channel one or a plurality of information channels to be multiplexed on the transport channel,
- wherein a Mapping Table (32) and a Transport Block Combination Table (34) are created as a result of prioritising the selected transport channels according to a predetermined scheme, in dependence on the characteristics of the information channels,
- 20 and the number of data units which may be transmitted from the respective buffer means to the transport channels in a timing interval is determined from the tables (32, 34).

[Figure 3]

THIS PAGE BLANK (USPTO)

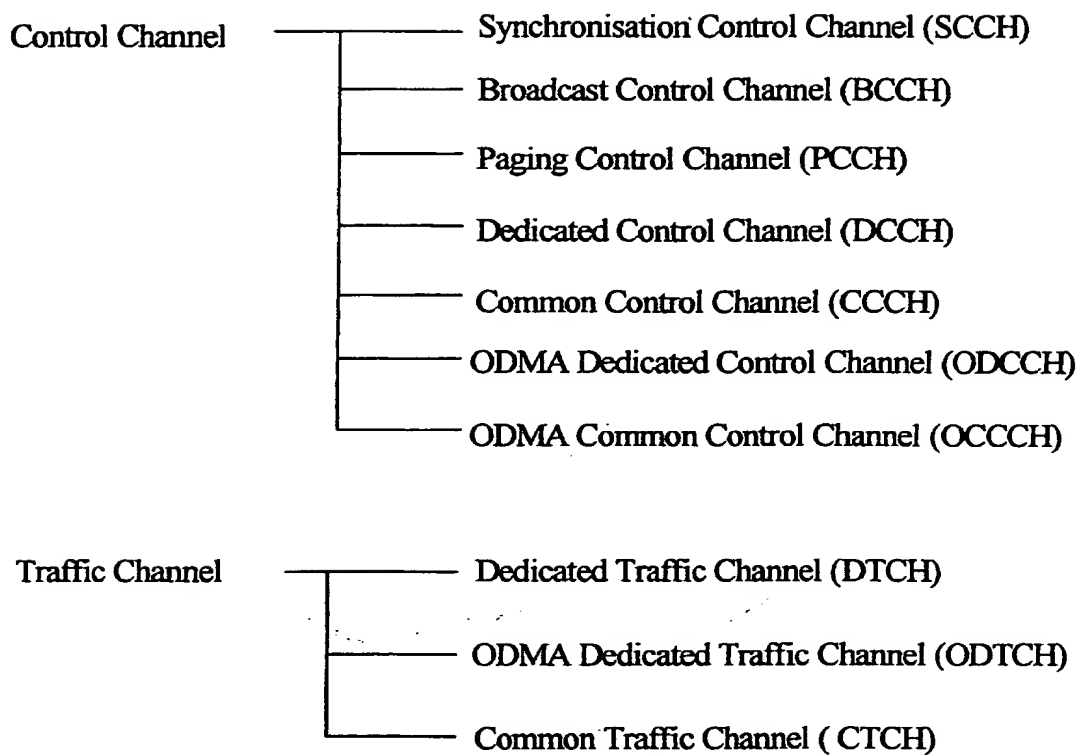
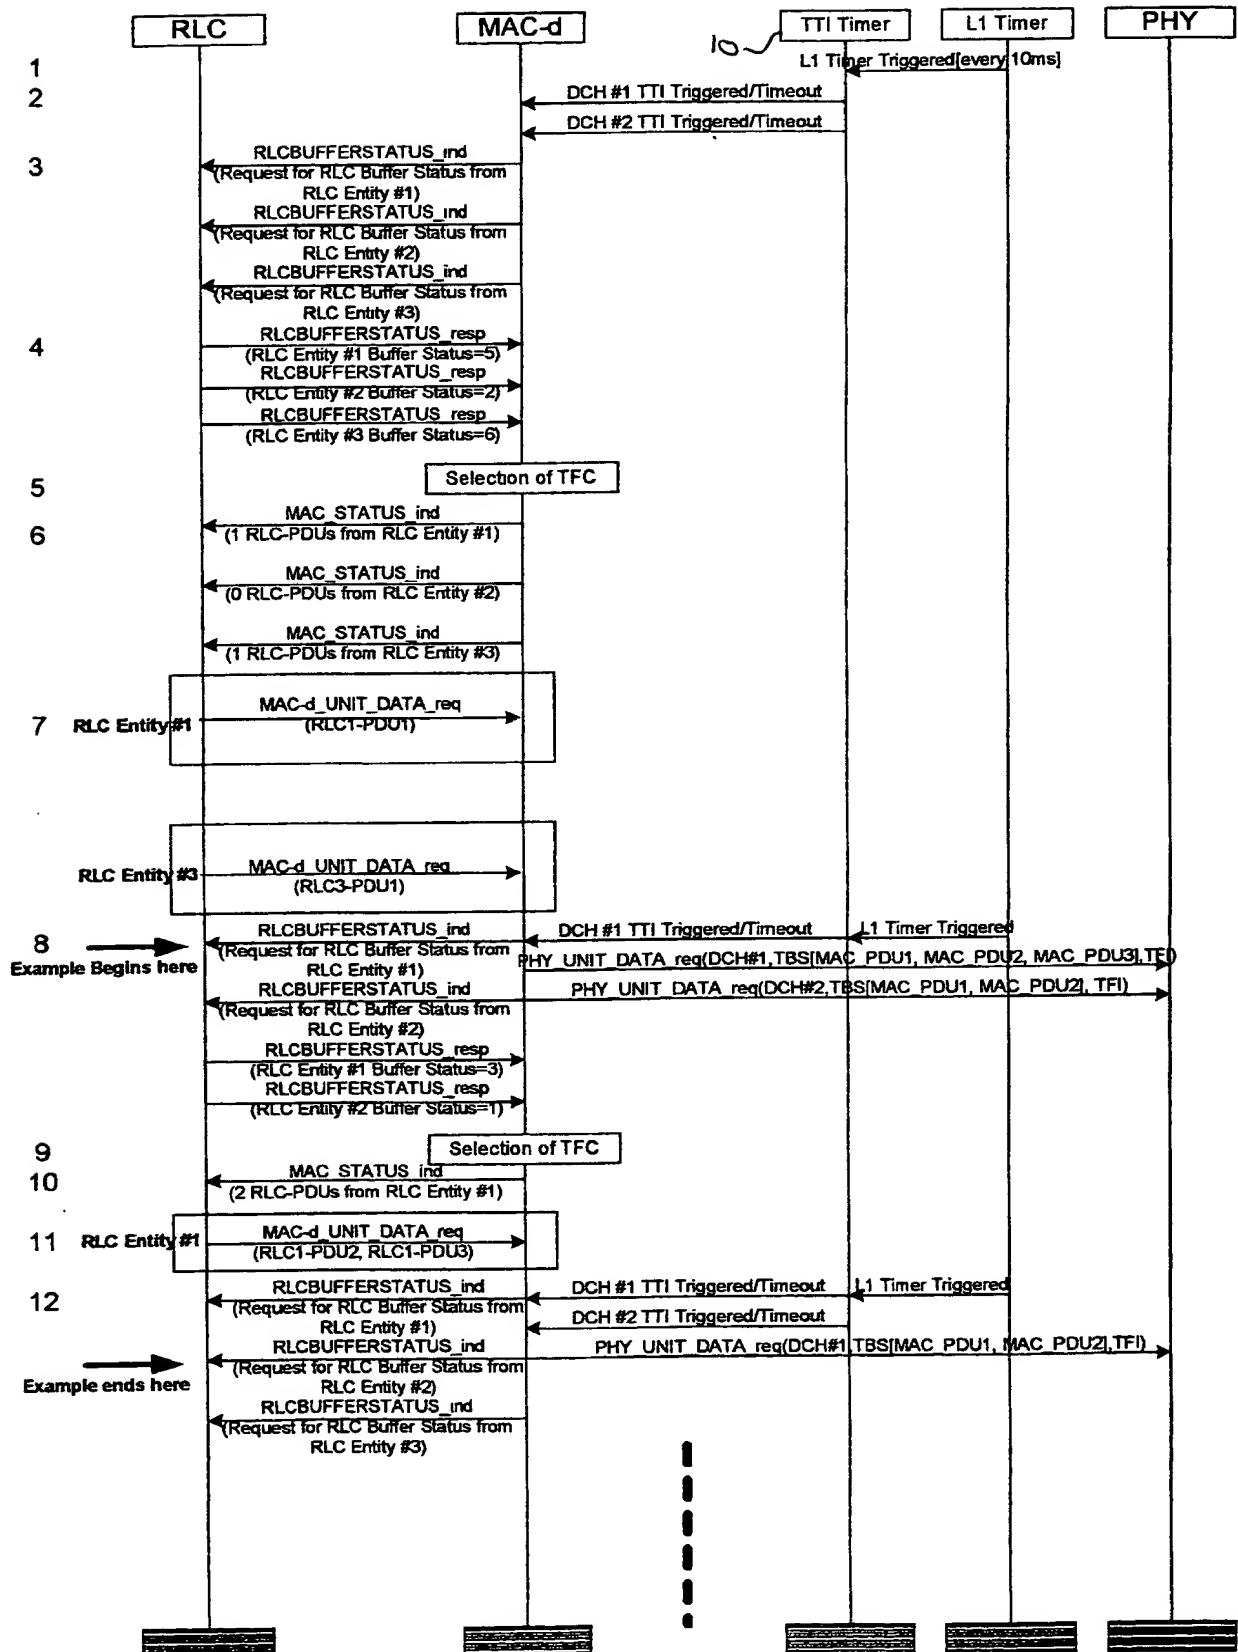
**Figure 1**

Figure 2



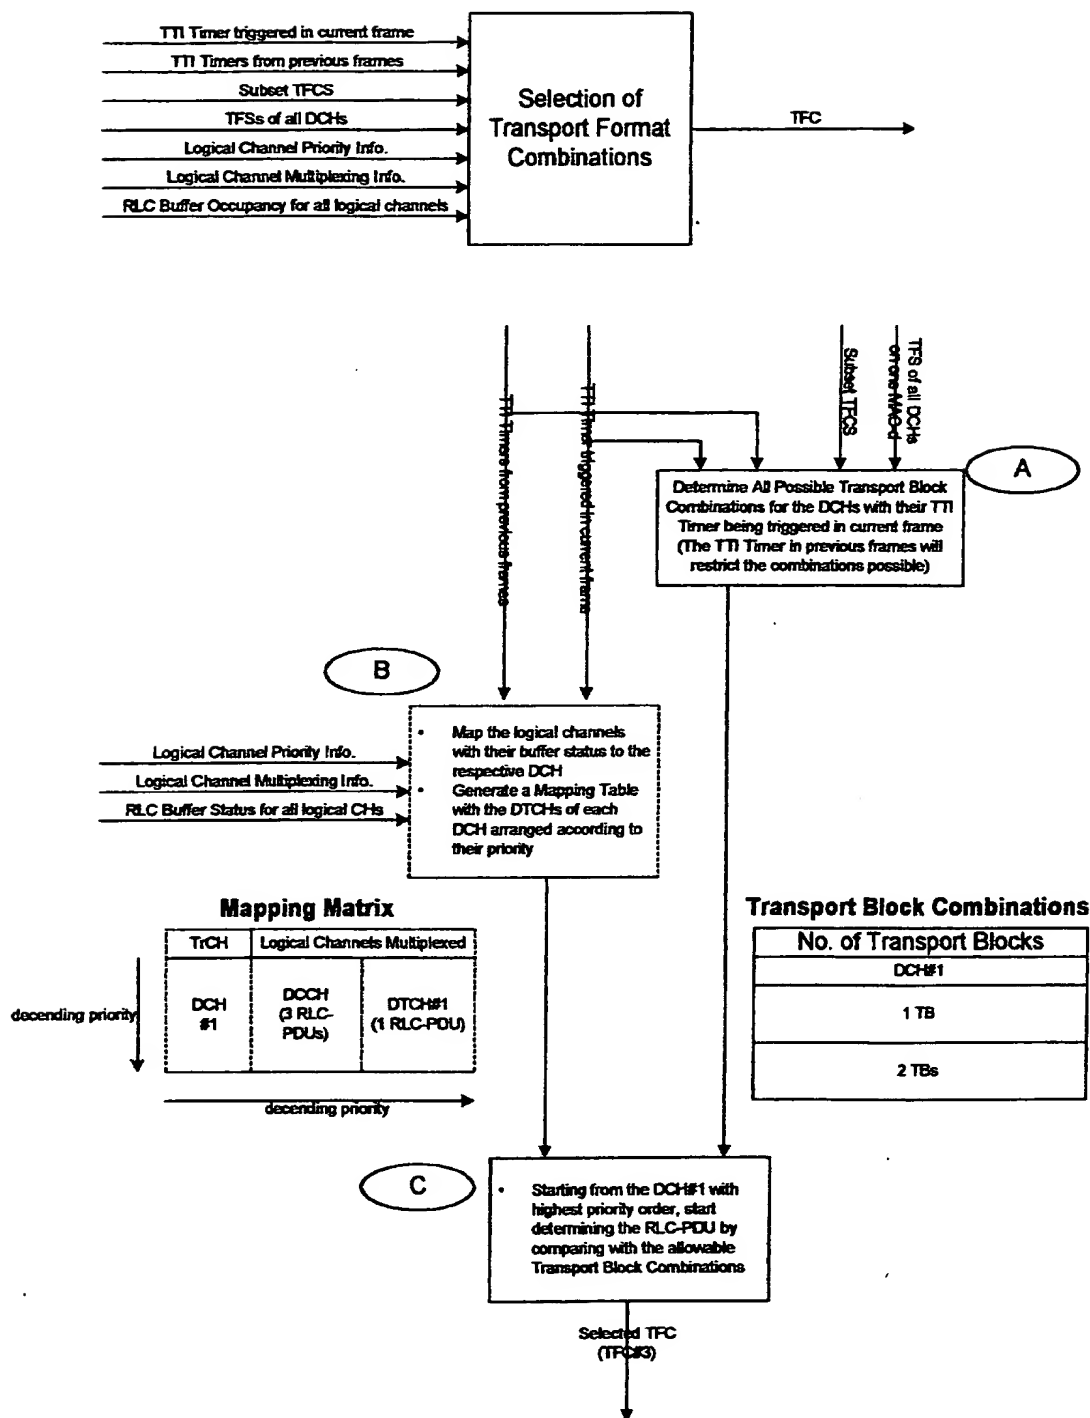


Figure 3

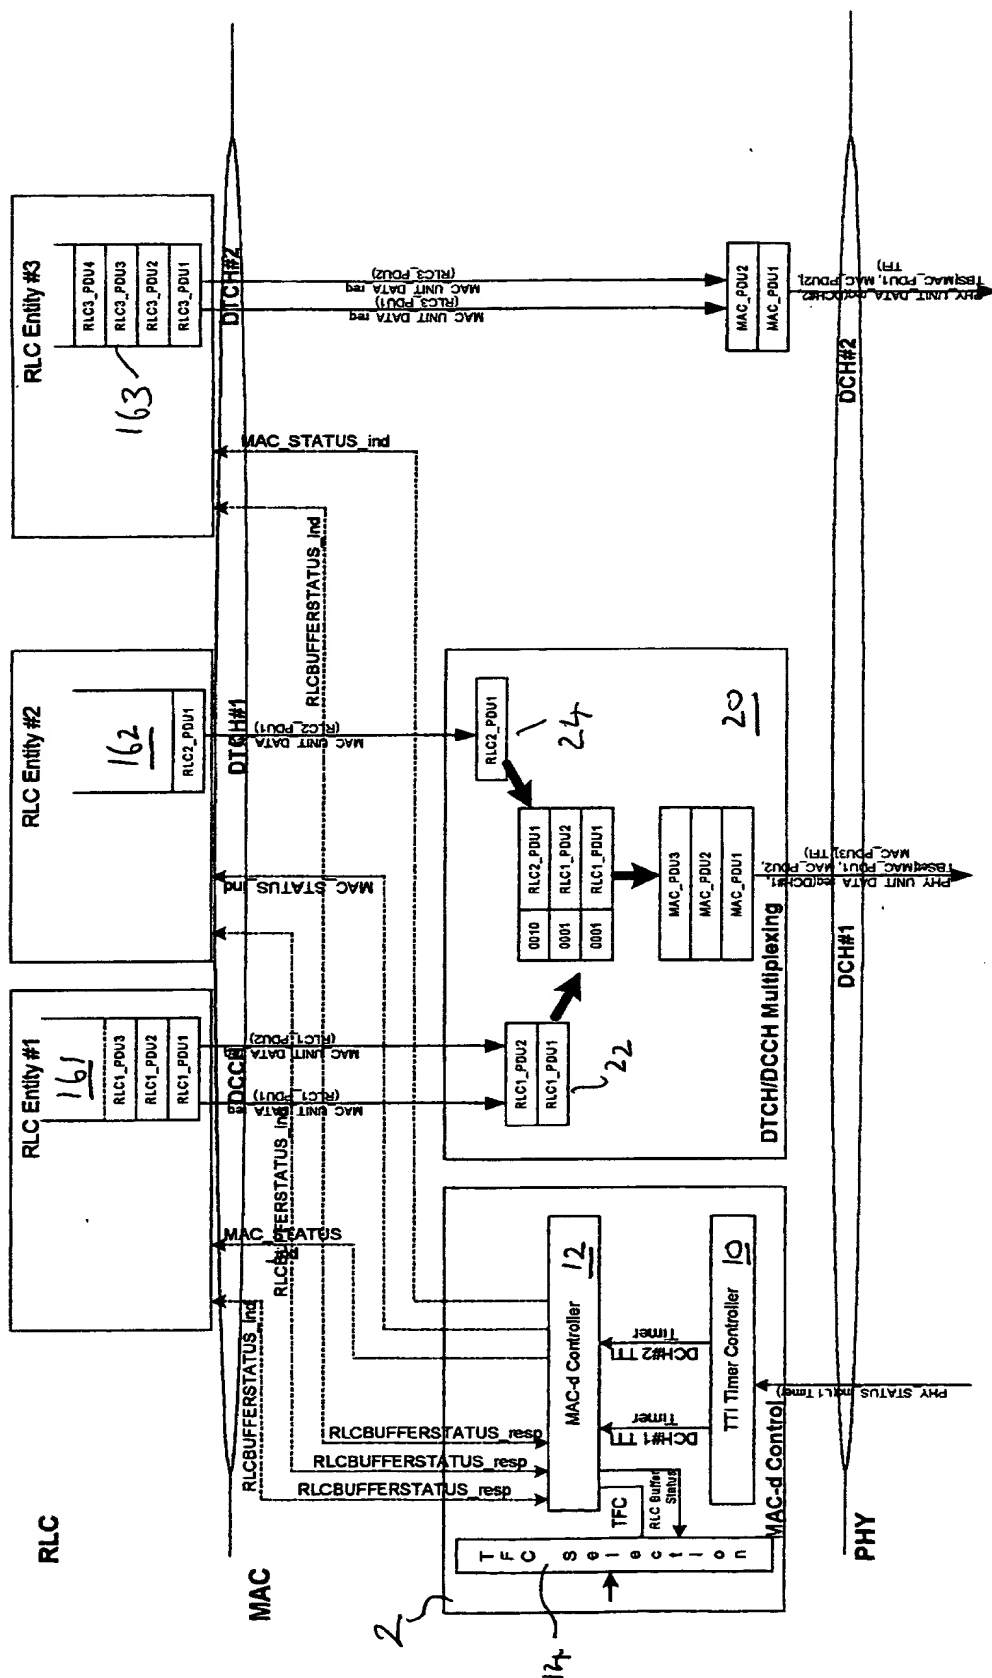


Figure 4

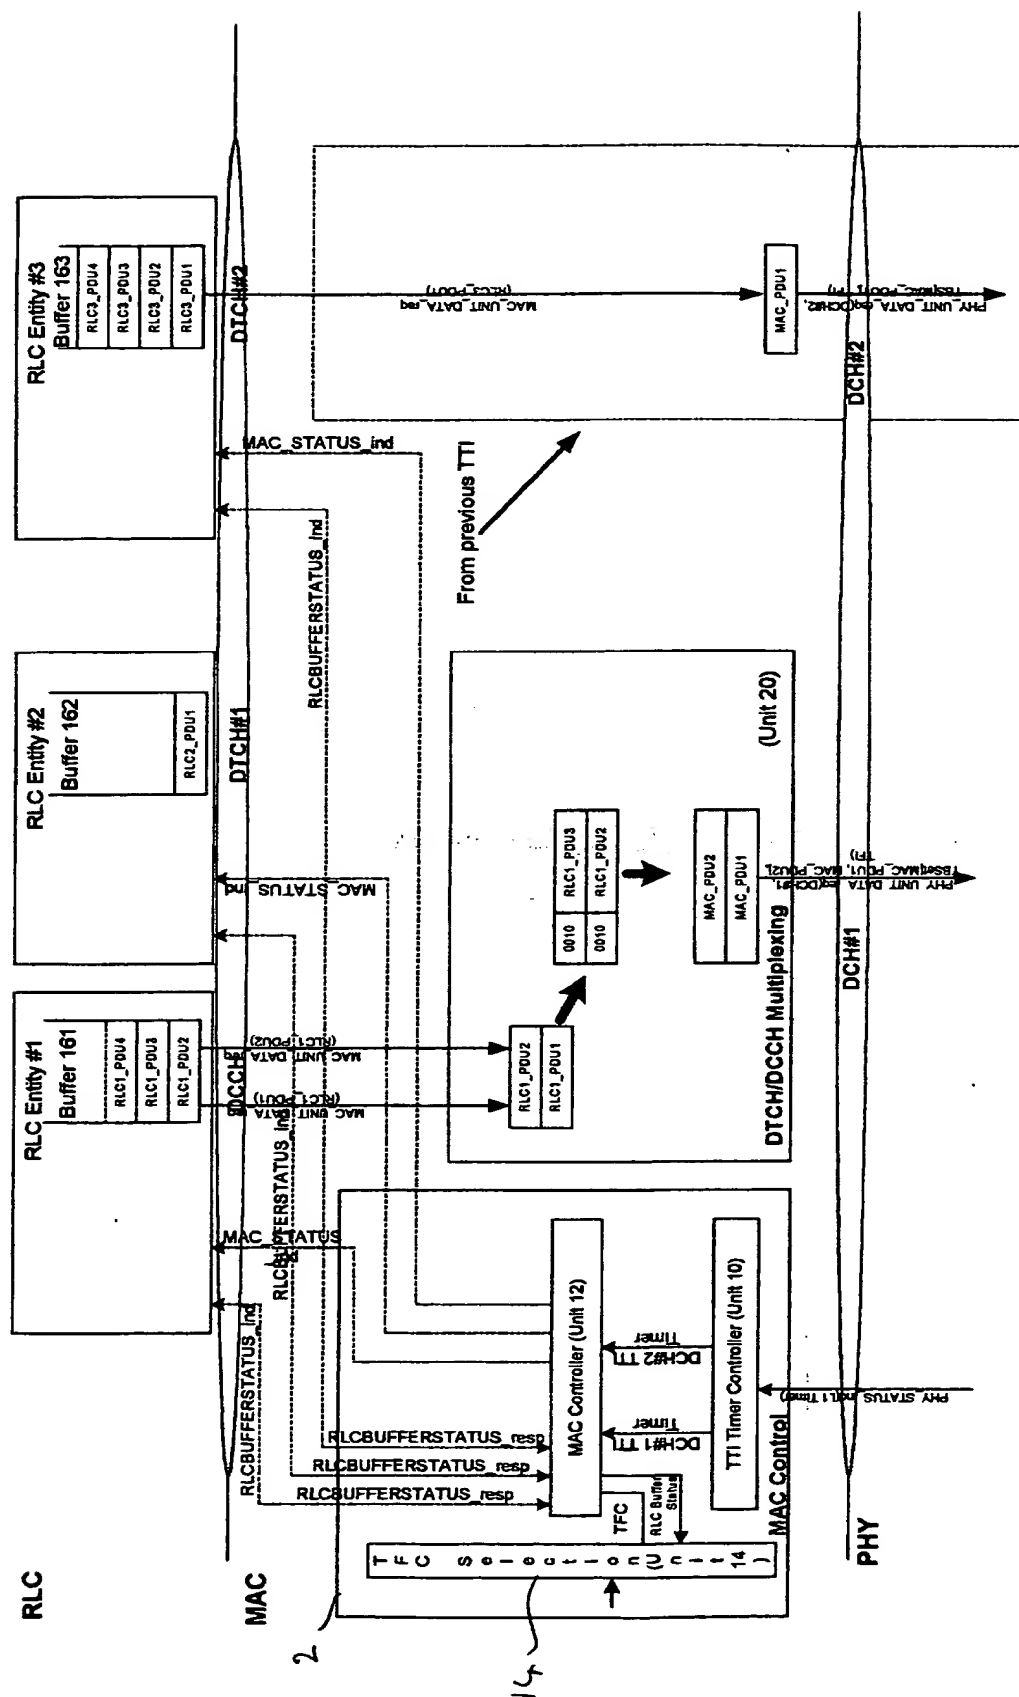


Figure 5

THIS PAGE BLANK (USPTO)